
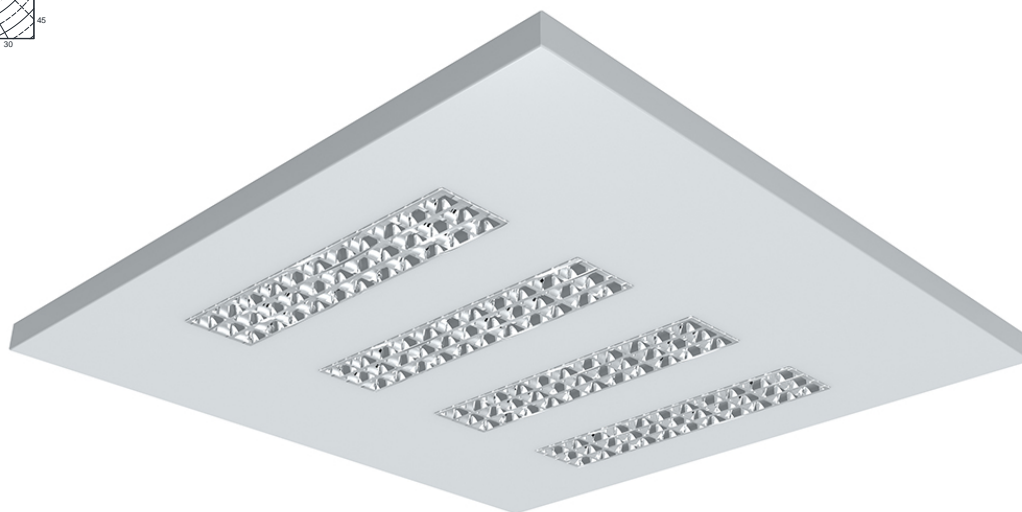


ISILI


RECESSED / SURFACE / SUSPENDED
SQUARE VERSION
(UGR<16)



LED			IP20				5 years warranty	50,000 hrs L80/B10 Ta=25°C	220-240V 50-60Hz		CE
-----	--	--	------	--	--	--	------------------	----------------------------------	---------------------	--	----

on request


ISILI	595	1195	330
	Recessed, Surface*, Suspended	Recessed, Surface*, Suspended	Surface, Suspended
	UGR<16	UGR<19	UGR<19
LIGHT OUTPUT	up to 4000 lm	up to 4000 lm	up to 2000 lm
EFFICIENCY	up to 111 lm/W	up to 111 lm/W	up to 110 lm/W
WIRING	ECG, on request: DALI, 1-10V On request: Emergency kit (1h, 3h)	ECG, on request: DALI, 1-10V On request: Emergency kit (1h, 3h)	ECG, on request: DALI, 1-10V On request: Emergency kit (1h, 3h)
CCT	3000 - 4000K	3000 - 4000K	3000 - 4000K
CRI	≥ 80 Ra	≥ 80 Ra	≥ 80 Ra
MATERIALS			
> Housing	Sheet steel	Sheet steel	Sheet steel
> Louver	Metallized PMMA + Transparent Polycarbonate	Metallized PMMA + Transparent Polycarbonat	Metallized PMMA + Transparent Polycarbonate
LIGHT DISTRIBUTION	Direct	Direct	Direct
SURFACE FINISH	White color (RAL9003); other colors on request		
ACCESSORIES	*Surface mounting plate for Glies Square Single Suspenders	*Surface mounting plate for Glies Line Double Suspenders	Single Suspenders

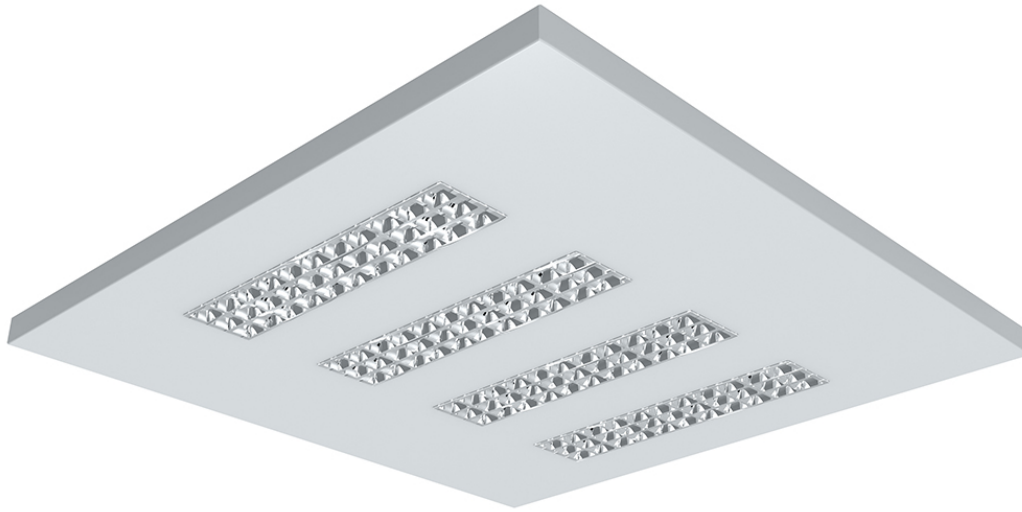

ISILI 595




ISILI 1195

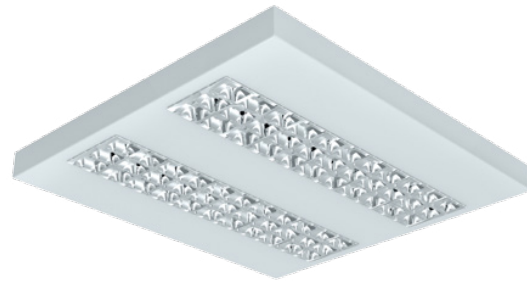


ISILI 330

drawing #1

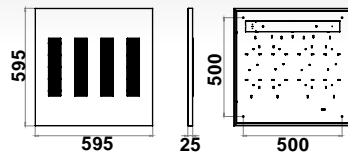

drawing #2



Net lumen output	CCT	Power	Dimensions	Weight	Purchase code
(lm)	(K)	(W)	(mm)	(kg)	
3140	3000	30	drawing #1	3.50	ISILI.595.30.3140.3K.20
3300	4000	30	drawing #1	3.50	ISILI.595.30.3300.4K.20
3600	3000	36	drawing #1	3.50	ISILI.595.36.3600.3K.20
4000	4000	36	drawing #1	3.50	ISILI.595.36.4000.4K.20
3140	3000	30	drawing #2	2.50	ISILI.1195.30.3140.3K.20
3300	4000	30	drawing #2	2.50	ISILI.1195.30.3300.4K.20
3600	3000	36	drawing #2	2.50	ISILI.1195.36.3600.3K.20
4000	4000	36	drawing #2	2.50	ISILI.1195.36.4000.4K.20
1570	3000	15	W:318, L:330, H:30	2.50	ISILI.330.15.1570.3K.20
1650	4000	15	W:318, L:330, H:30	2.50	ISILI.330.15.1650.4K.20
1900	3000	19	W:318, L:330, H:30	2.50	ISILI.330.19.1900.3K.20
2000	4000	19	W:318, L:330, H:30	2.50	ISILI.330.19.2000.4K.20
1	Surface mounting plate for 595				ISILI.ACS.SUR.PLATE
2	Kit of 4 suspension 1,5m				ISILI.ACS.KIT.SUS.1500