
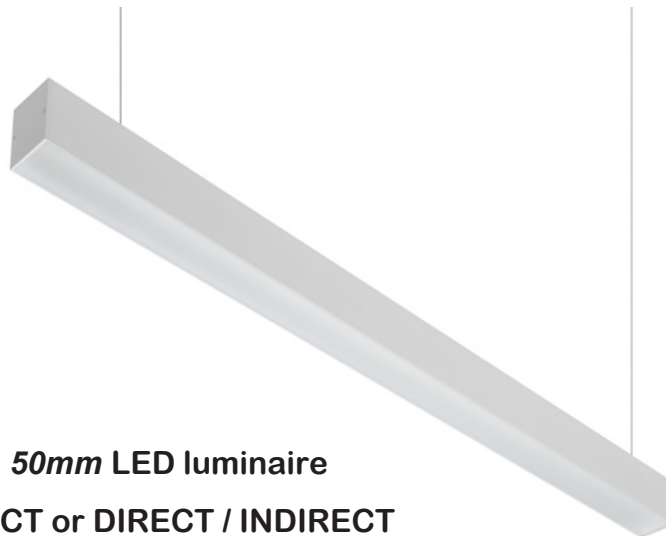
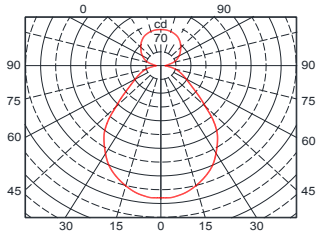


TORPE II

Surface / Suspended
IP20

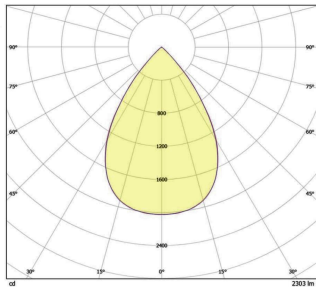

SLIM 50mm LED luminaire
DIRECT or DIRECT / INDIRECT



LED							IP20		5 years warranty	50,000 hrs L80/B20 Ta=25°C	220-240V 50-60Hz		CE
-----	--	--	--	--	--	--	------	--	------------------	----------------------------------	---------------------	--	----

on request


TORPE II

TORPE II
Surface / Suspended

LIGHT OUTPUT	up to 4950 lm
EFFICIENCY	up to 126 lm/W
WIRING	ECG, on request: Push dimm, DALI, On request: Emergency kit 3h)
CCT	3000K or 4000K On request: 5000K
CRI	CRI80, on request CRI90
MATERIALS	
> Housing	Extruded aluminium profile
> Diffuser	Opal PMMA or Microprisma PMMA + foil
> End caps	Aluminium
LIGHT DISTRIBUTION	Direct or Direct/Indirect
ADVANTAGES	Slim luminaire, Single or continuous mounting
SURFACE FINISH	White RaI9003 colour, Black RaI9005 colour or Grey aluminium
ACCESSORIES	Suspensions, Continuous mounting parts, Brackets for surface mounting, Transparent supply cable 3pole or 5pole

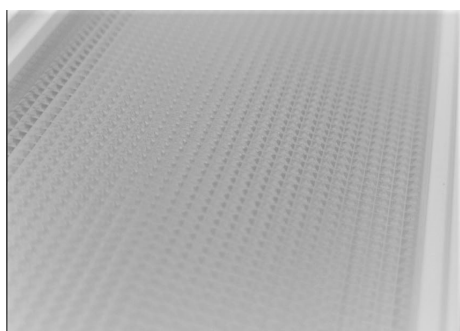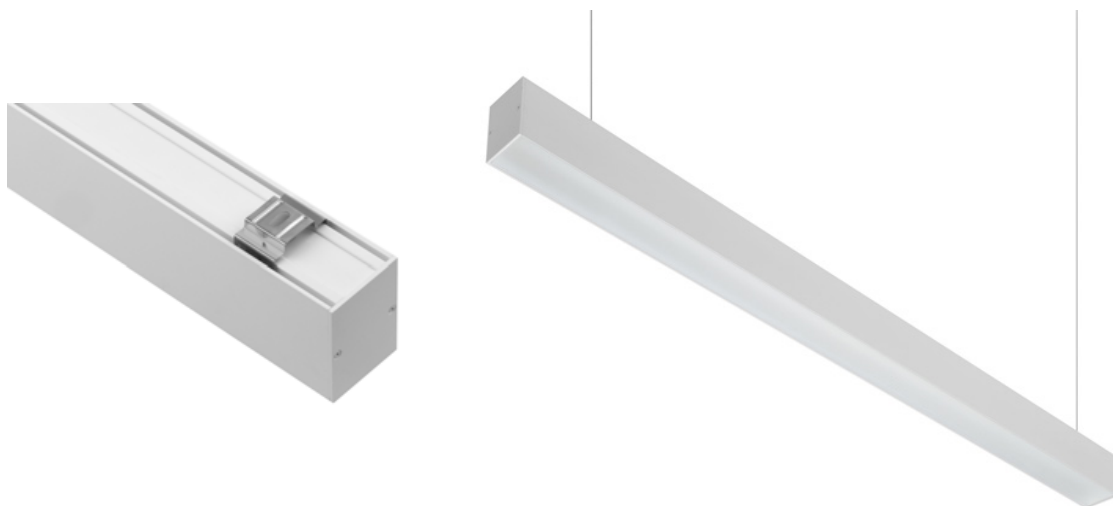

drawing #1

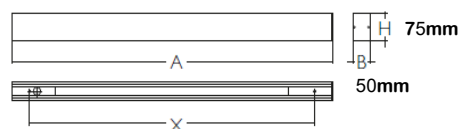

Net lumen output	CCT	Power	Dimensions	Weight	Purchase code
(lm)	(K)	(W)	(mm)	(kg)	
1500	3000	15	A: 580 X:510	2.10	TORPE.60.15.1500.3K.20OP
1650	4000	15	A: 580 X:510	2.10	TORPE.60.15.1650.4K.20OP
1360	3000	15	A: 580 X:510	2.10	TORPE.60.15.1360.3K.20MI
1500	4000	15	A: 580 X:510	2.10	TORPE.60.15.1500.4K.20MI
3500	3000	35	A: 1140 X:1070	3.30	TORPE.120.35.3500.3K.20OP
3850	4000	35	A: 1140 X:1070	3.30	TORPE.120.35.3850.4K.20OP
3200	3000	35	A: 1140 X:1070	3.30	TORPE.120.35.3200.3K.20MI
3500	4000	35	A: 1140 X:1070	3.30	TORPE.120.35.3500.4K.20MI
4500	3000	45	A: 1420 X:1350	4.00	TORPE.150.45.4500.3K.20OP
4950	4000	45	A: 1420 X:1350	4.00	TORPE.150.45.4950.4K.20OP
4100	3000	45	A: 1420 X:1350	4.00	TORPE.150.45.4100.3K.20MI
4500	4000	45	A: 1420 X:1350	4.00	TORPE.150.45.4500.4K.20MI
3850	4000	35	A: 1140 X:1070	3.50	TORPE.120.35.3850.4K.20OPdi
3500	4000	35	A: 1140 X:1070	3.50	TORPE.120.35.3500.4K.20MIIdi
4950	4000	45	A: 1420 X:1350	4.50	TORPE.150.45.4950.4K.20OPdi
4500	4000	45	A: 1420 X:1350	4.50	TORPE.150.45.4500.4K.20MIIdi

Note: various watt and lumens versions available on request.