


ERA

PROJECTOR / OUTDOOR
IP66




Asymmetrical distribution Symmetrical 60°

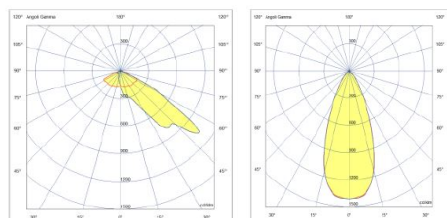

Symmetrical 90°

Symmetrical 120°

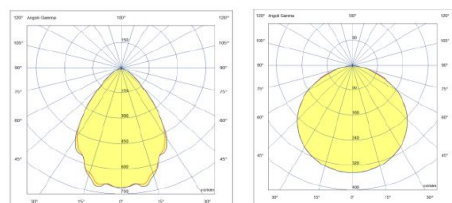

On request

5 years
warranty

220-240V
50-60Hz



ERA

Outdoor / Projector

LIGHT OUTPUT

up to 33700 lm

EFFICIENCY

139lm/W @ 700mA Samsung LH181B+

WIRING

ECG, on request: DALI

CCT

4000K

CRI

≥ 80 Ra

MATERIALS

> Housing & Frame

Aluminium die cast ENAB46100

> Diffuser

Tempered floating Glass - extra clear - 4mm thickness

> Lences

PMMA

LIGHT DISTRIBUTION

Asymmetric / Symmetric 60° or 90° or 120°

SURFACE FINISH


Black color (RAL9005), other on request

ACCESSORIES

Adjustable mounting bracket with stainless steel screws for surface fixation



drawing

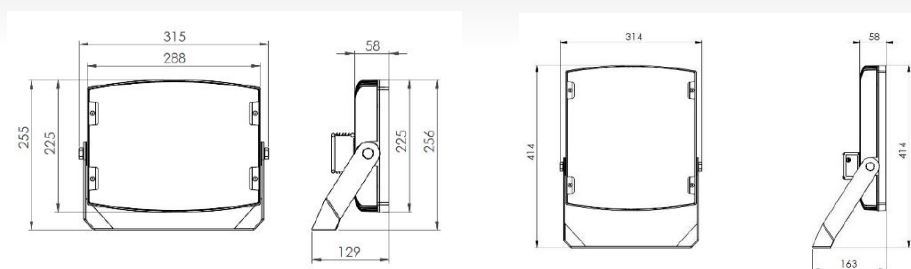

Nominal lumen output	CCT	Power	Dimensions	Weight	Purchase code
(lm)	(K)	(W)	(mm)	(kg)	
8880	4000	40	255x315x129	4.00	ERA.255.40.8880.4K.66
11680	4000	80	255x315x129	4.40	ERA.255.80.11680.4K.66
16300	4000	120	255x315x129	4.40	ERA.255.120.16300.4K.66
33700	4000	240	414 x314x 163	6.00	ERA.414.240.33700.4K.66