
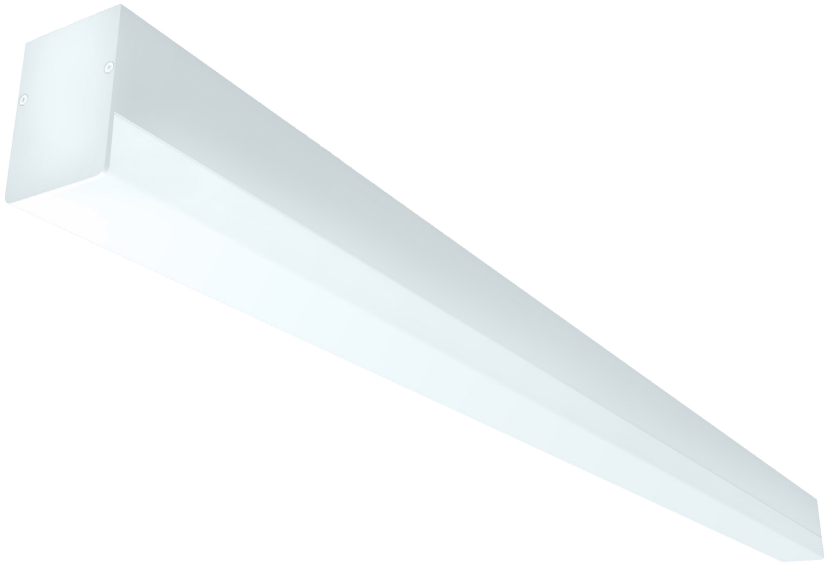




LED			 ECG	IP21	5 years warranty	60,000 hrs L80/B10 Ta=25°C	220-240V 50-60Hz		CE
-----	---	---	---	------	------------------	----------------------------------	---------------------	---	----

GONI IP21


Surface / Suspended

LIGHT OUTPUT	up to 6000 lm
EFFICIENCY	up to 125 lm/W
WIRING	ECG Supplied with white cable (3x0.5mm ² L=600mm)
CCT	3000 - 4000K
CRI	≥ 80 Ra
MATERIALS	
> Housing	Anodised aluminium profile
> Diffuser	Opal PMMA high diffusive on request: Opal PC
> End caps	Anodised aluminium
LIGHT DISTRIBUTION	Direct
ACCESSORIES	Kit of 2 suspensions 1,50m Transparent feeding cable 1mt 3x0,75mm ² - on request



Anodised aluminium end caps

drawing

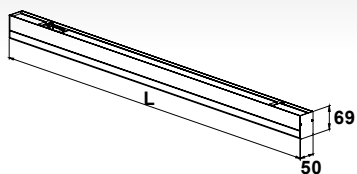

Net lumen output	CCT	Power	Dimension	Weight	Purchase code
(lm)	(K)	(W)	(mm)	(kg)	
1900	3000	16	L: 575	0,64	GONI.60.16.1900.3K.21
2000	4000	16	L: 575	0,64	GONI.60.16.2000.4K.21
3800	3000	32	L: 1135	0,88	GONI.120.32.3800.3K.21
4000	4000	32	L: 1135	0,88	GONI.120.32.4000.4K.21
4750	3000	40	L: 1415	1,22	GONI.150.40.4750.3K.21
5000	4000	40	L: 1415	1,22	GONI.150.40.5000.4K.21
5700	3000	48	L: 1695	1,73	GONI.170.48.5700.3K.21
6000	4000	48	L: 1695	1,73	GONI.170.48.6000.4K.21
#	Accessories (ACS)				Purchase code
1	Kit of 2 suspensions 1,50m				GONI.ACS.KIT.SUS.1500
2	Transparent feeding cable 1mt 3x0,75mm2				GONI.ACS.TRA.3.075.1000