


# OROSEI

SUSPENDED  
OPAL + MICROPRISM (UGR<19)



<b>LED</b>			IP20			
	Direct/Indirect			on request		

5 years warranty

50,000 hrs  
L80/B10  
Ta=25°C

220-240V  
50-60Hz



## OROSEI

### Opal + Microprismatic

Suspended

**UGR<19**

#### LIGHT OUTPUT

up to 6000 lm

#### EFFICIENCY

up to 94 lm/W

#### WIRING

ECG, on request: DALI, Push dim  
On request: Emergency kit (1h, 3h)

#### CCT

3000 - 4000K

#### CRI

≥ 80 Ra

#### MATERIALS

> Housing

Sheet steel

> Diffuser

Opal PMMA Mat Pattern + Microprismatic

#### LIGHT DISTRIBUTION


Direct 80% / Indirect 20%

#### SURFACE FINISH


White color (RAL9003); other colors on request

#### ACCESSORIES



Double suspenders

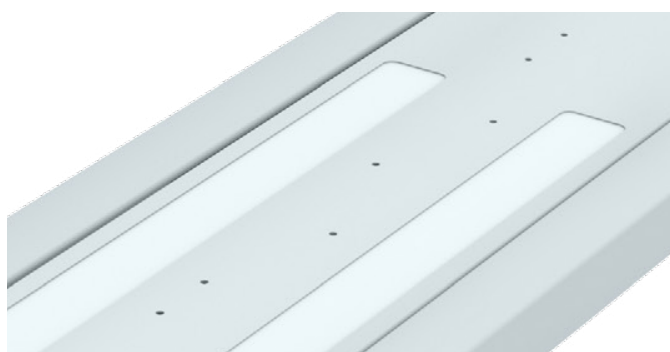

Indirect light distribution 20%

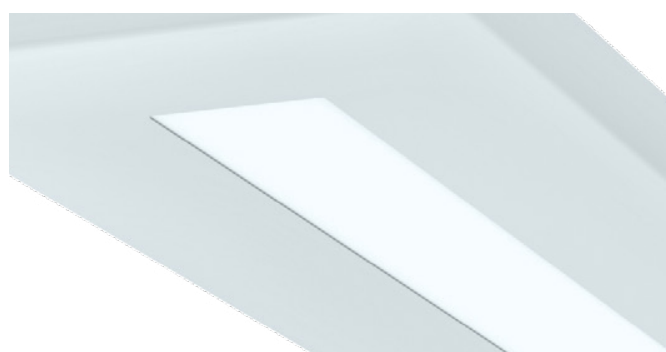

Direct light distribution 80%



Net lumen output	CCT	Power	Dimensions	Weight	Purchase code
(lm)	(K)	(W)	(mm)	(kg)	
4400	3000	51	drawing #1	4.50	OROSEI.130.51.4400.3K.20
4630	4000	51	drawing #1	4.50	OROSEI.130.51.4630.4K.20
5700	3000	64	drawing #2	4.70	OROSEI.160.64.5700.3K.20
6000	4000	64	drawing #2	4.70	OROSEI.160.64.6000.4K.20