

NUORO

Recessed
IP44



Microprisma
UGR




LED			IP44	 on request	5 years warranty	50,000 hrs L80/B20 Ta=25°C	220-240V 50-60Hz		CE
-----	--	--	------	----------------	------------------	----------------------------------	---------------------	--	----

NUORO

NUORO
Recessed / Plasteboard

LIGHT OUTPUT	up to 3300 lm
EFFICIENCY	up to 122 lm/W
WIRING	ECG, on request: DALI
CCT	3000 - 4000 K
CRI	≥ 80 Ra
MATERIALS	
> Housing	Aluminium
> Diffuser	Opal (PMMA Mat Pattern) or Microprisma UGR
LIGHT DISTRIBUTION	Direct
SURFACE FINISH	Housing - white mat color (RAL9003); other colors on request

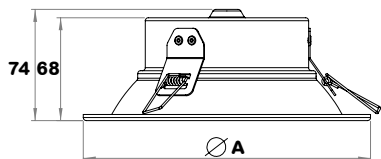

ØA 170mm - mounting hole **145mm**
 ØA 190mm - mounting hole **165mm**
 ØA 220mm - mounting hole **195mm**
 ØA 255mm - mounting hole **230mm**
 ØA 330mm - mounting hole **305mm**

Netto lm output		CCT	Power	Dimensions (ØA)	Weight	Purchase code
UGR Microprisma	Opal					
(lm)	(lm)	(K)	(W)	(mm)	(kg)	
1240	1170	3000	12	170	0.40	NUORO.170.12.1170.3K.44
1300	1240	4000	12	170	0.40	NUORO.170.12.1240.4K.44
1650	1550	3000	16	170	0.40	NUORO.170.16.1550.3K.44
1730	1650	4000	16	170	0.40	NUORO.170.16.1650.4K.44
1240	1170	3000	12	190	0.50	NUORO.190.12.1170.3K.44
1300	1240	4000	12	190	0.50	NUORO.190.12.1240.4K.44
1650	1550	3000	16	190	0.50	NUORO.190.16.1550.3K.44
1730	1650	4000	16	190	0.50	NUORO.190.16.1650.4K.44
2320	2200	3000	20	220	0.70	NUORO.220.20.2200.3K.44
2440	2325	4000	20	220	0.70	NUORO.220.20.2325.4K.44
2580	2455	3000	24	220	0.70	NUORO.220.24.2455.3K.44
2710	2585	4000	24	220	0.70	NUORO.220.24.2585.4K.44
2800	2660	3000	25	255	0.90	NUORO.255.25.2660.3K.44
2940	2800	4000	25	255	0.90	NUORO.255.25.2800.4K.44
3200	3050	3000	29	255	0.90	NUORO.255.29.3050.3K.44
3360	3200	4000	29	255	0.90	NUORO.255.29.3200.4K.44
2800	2650	3000	28	330	1.05	NUORO.330.28.2650.3K.44
2940	2800	4000	28	330	1.05	NUORO.330.28.2800.4K.44